




Commercial Plywood

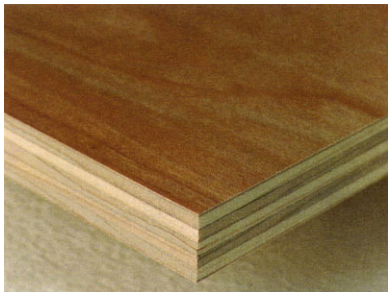

Thickness:
 6 mm (0.25 in)
 12 mm (0.50 in)
 18 mm (0.75 in)
 24 mm (1.00 in)

Size:
 1220 x 2440 mm (4 ft x 8 ft)

Glue:
 MR
 WBP – Melamine
 WBP – Pheolic
 E1/ E2

Grade:
 A B/B
 A/B B/BB
 A/BB BB/CC

Core Veneer:	Face:
Hardwood	Birch
Poplar	Pine
Birch	Okume
Okume	Meranti
Eucalyptus	Luan

Fancy Plywood



Red Oak



White Oak



Beech



White Ash



Teak

Thickness:
 6 mm (0.25 in)

Size:
 1220 x 2440 mm (4 ft x 8 ft)


Glue:
 E1/ E2

Core Veneer:
 Poplar
 Birch
 MDF
 Okume

Veneer:
 Rotary
 Quarter Slice
 Plain Slice
 Crown Cut

Grade:
 A B/B
 A/B C/C
 B/C C/D

Film Faced Plywood

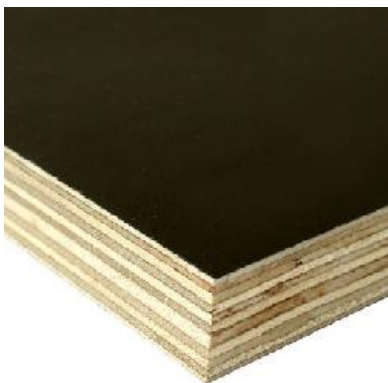

Thickness:
 6 mm (0.25 in)
 12 mm (0.50 in)
 18 mm (0.75 in)
 24 mm (1.00 in)

Size:
 1220 x 2440 mm (4 ft x 8 ft)

Glue:
 MR
 WBP – Melamine
 WBP – Pheolic
 E1/ E2

Grade:
 A B/B
 A/B B/BB
 A/BB BB/CC

Core Veneer:	Face:	Film Type:
Hardwood	Birch	Dark Brown (Dynea)
Poplar	Pine	Dark Brown (Enso)
Birch	Okume	Black (Chinese)
Okume	Meranti	Anti Slip
Eucalyptus	Luan	